

E.ON tölti ki:

□□□□_□□□□□□

Betétlap „H” árszabás igényléséhez

Igénybejelentő (szerződő) neve: _____

Igénybejelentő (szerződő) felhasználó azonosító: □□□□□□□□□□

1. Hőszivattyúk

Az áramkörre csatlakoztatott berendezések műszaki adatlapjának, illetve a berendezés energiacímkejének másolatát kérjük csatolja igénybejelentéséhez.

A műszaki adatlap, és energiacímke másolatát átvettem (Ügyfélszolgálat tölti!)

2. Hőszivattyú azonosítása

Hőszivattyú gyártója: _____

Hőszivattyú típusa: _____

Azonos típusú készülékek száma: 1 db több, és pedig _____ db

3. Hőszivattyú villamos paraméterei

Hőszivattyú villamos csatlakozása: 1 fázis 3 fázis

Hőszivattyú névleges fűtőteljesítménye (kW): _____

Hőszivattyú névleges villamos teljesítmény felvétele (kW): _____

Indítási áramerősség mérséklésének módja: Lágymű Inverter Nincs

Névleges üzemi áramerősség (A): _____ Maximális áramerősség (A): _____

Gyártó által javasolt biztosító áramértéke, karakterisztikája: _____

Kiegészítő villamos fűtés teljesítménye (kW): _____

Kiegészítő villamos fűtés villamos csatlakozás szempontjából különválasztható? Igen Nem

Kiegészítő villamos fűtés fogyasztásának számított részaránya a teljes hőszivattyús rendszer éves villamos energia-fogyasztásához viszonyítva (%): (amennyiben nem választható külön) _____

4. Hőszivattyú üzeme

Rendszer felhasználása: Hűtés Fűtés Használati meleg víz

Hőforrás: Talajszonda Talajkollektor Vízkút Levegő Egyéb: _____

Hőátadó közeg: Víz Levegő Egyéb: _____ SCOP (szezonális jósági fok): _____

5. Egyéb közlendő:

Kivitelező neve: _____

Kivitelező címe: _____

Kivitelező telefonszáma: _____

Kivitelező e-mail címe: _____

Kijelentem, hogy a közölt adatok a valóságnak megfelelnek.

Alulírott, mint a belső villamos hálózat kivitelezője kijelentem, hogy a külön mért felhasználói áramkörre (H tarifás áramkör) állandó jelleggel, megfelelő segédeszköz (szerszám) hiányában állagsérelem nélkül nem leválasztható módon, nem dugaszolhatóan kerülnek csatlakoztatásra a H tarifával ellátható berendezések. Más berendezés a H tarifás áramkörre nem csatlakoztatható.

A kivitelezést, a vonatkozó jogszabályi előírásoknak, műszaki biztonsági követelményeknek megfelelően végeztem el.

Kivitelező aláírása _____

Elosztói engedélyesek elérhetőségei

Telefonos ügyfélszolgálat
Lakossági ügyfelek
h, k, cs, p 8.00-18.00
sz 8.00-20.00
Üzleti ügyfelek
h-p 7.30-20.00

Áram ügyintézés
Lakossági ügyfelek
T: 06 52/ 512 400
M: 06 20/30/70 45 99 600
Üzleti ügyfelek
T: 1423

Levélcímkünk
(lakossági és üzleti)
7602 Pécs, Pf. 197

www.eon.hu
aramhalozat@eon.hu

Erkezett

Iktatási szám

Felhasználó azonosító

Felhasználási hely száma

Ügyintéző

2.2 WH-SXC12H6E5 WH-UX12HE5

Item		Unit	Outdoor Unit		
Performance Test Condition			EN 14511		
Cooling Capacity	Condition (Ambient/Water)		A35W7		
	kW		10.00		
	BTU/h		34100		
	kcal/h		8600		
Cooling EER	W/W		2.81		
	kcal/hW		2.42		
Heating Capacity	Condition (Ambient/Water)		A7W35	A2W35	
	kW		12.00	12.00	
	BTU/h		41000	41000	
	kcal/h		10320	10320	
Heating COP	W/W		4.74	3.44	
	kcal/hW		4.08	2.96	
Heating ErP	Low Temperature Application (W35)		Warmer	Average	Colder
	Application	Climate			
	Pdesign	kW	12.0	12.0	14.0
	Tbivalent / TOL	°C	2 / 2	-10 / -10	-15 / -22
	SCOP / ns	(W/W) / %	5.86 / 231	4.32 / 170	4.08 / 160
	Annual Consumption	kWh	2738	5745	8460
	Class		A++	A++	A++
	Medium Temperature Application (W55)		Warmer	Average	Colder
	Application	Climate			
	Pdesign	kW	12.0	12.0	13.0
	Tbivalent / TOL	°C	2 / 2	-10 / -10	-15 / -22
	SCOP / ns	(W/W) / %	4.02 / 158	3.32 / 130	3.20 / 125
	Annual Consumption	kWh	3990	7466	10012
	Class		A++	A++	A++
Noise Level	Condition (Ambient/Water)		A35W7	A7W35	A2W35
	dB (A)		Cooling: 50	Heating: 52	—
	Power Level dB		Cooling: 68	Heating: 69	—
Air Flow	m ³ /min (ft ³ /min)		Cooling: 93.3 (3290) Heating: 80.0 (2830)		
Refrigeration Control Device			Expansion Valve		
Refrigeration Oil	cm ³		FV50S (1200)		
Refrigerant (R410A)	kg (oz)		2.85 (100.6)		
F-GAS	GWP		2088		
	CO2eq (ton) (Precharged / Maximum)		5.951 / 8.039		
Dimension	Height	mm (inch)	1340 (52-3/4)		
	Width	mm (inch)	900 (35-7/16)		
	Depth	mm (inch)	320 (12-19/32)		
Net Weight	kg (lbs)		101 (223)		
Pipe Diameter	Liquid	mm (inch)	9.52 (3/8)		
	Gas	mm (inch)	15.88 (5/8)		
Standard Length	m (ft)		7 (23.0)		
Pipe Length Range	m (ft)		3 (9.8) ~ 30 (98.4)		
I/D & O/D Height Difference	m (ft)		20 (65.6)		
Additional Gas Amount	g/m (oz/ft)		50 (0.5)		
Refrigeration Charge Less	m (ft)		10 (32.8)		

Item		Unit	Outdoor Unit		
Compressor	Type		Hermetic Motor		
	Motor Type		Brushless (4-poles)		
	Rated Output	kW	3.00		
Fan	Type		Propeller Fan		
	Material		PP		
	Motor Type		DC (8-poles)		
	Input Power	W	—		
	Output Power	W	60		
	Fan Speed	rpm	Cooling: 600 (Top), 640 (Bottom) Heating: 520 (Top), 560 (Bottom)		
Heat Exchanger	Fin material		Aluminium (Pre Coat)		
	Fin Type		Corrugated Fin		
	Row × Stage × FPI		2 × 51 × 18		
	Size (W × H × L)	mm	903.7 × 1295.4 × 38.1		
Power Source (Phase, Voltage, Cycle)	∅		Single		
	V		230		
	Hz		50		
Input Power	Condition (Ambient/Water)		A35W7	A7W35	A2W35
	kW		Cooling: 3.56	Heating: 2.53	Heating: 3.49
Maximum Input Power For Heatpump System	kW		6.27		
Power Supply 1 : Phase (∅) / Max. Current (A) / Max. Input Power (W)			1∅ / 29.0 / 6.27k		
Power Supply 2 : Phase (∅) / Max. Current (A) / Max. Input Power (W)			1∅ / 26.0 / 6.00k		
Power Supply 3 : Phase (∅) / Max. Current (A) / Max. Input Power (W)			— / — / —		
Starting Current	A		16.5		
Running Current	Condition (Ambient/Water)		A35W7	A7W35	A2W35
	A		Cooling: 16.5	Heating: 11.7	Heating: 16.1
Maximum Current For Heatpump System	A		29.0		
Power Factor Power factor means total figure of compressor and outdoor fan motor.	%		Cooling: 94	Heating: 94	Heating: 94
Power Cord	Number of core		—		
	Length	m (ft)	—		
Thermostat			Electronic Control		
Protection Device			Electronic Control		

Item		Unit	Indoor Unit		
Performance Test Condition			EN 14511		
Operation Range	Outdoor Ambient	°C	Cooling: 16 ~ 43 Heating: -28 ~ 25		
	Water Outlet	°C	Cooling: 5 ~ 20 Heating: 20 ~ 55 (Below Ambient -15°C) 20 ~ 60 (Below Ambient -10°C)		
Internal Pressure Differential		kPa	Cooling: 36 Heating: 52		
Noise Level	Condition (Ambient/Water)		A35W7	A7W35	A2W35
	dB (A)		Cooling: 33	Heating: 33	—
	Power Level dB		Cooling: 46	Heating: 46	—
Dimension	Height	mm (inch)	892 (35-1/8)		
	Width	mm (inch)	500 (19-11/16)		
	Depth	mm (inch)	340 (13-13/32)		
Net Weight		kg (lbs)	43 (95)		
Refrigerant Pipe Diameter	Liquid	mm (inch)	9.52 (3/8)		
	Gas	mm (inch)	15.88 (5/8)		
Water Pipe Diameter	Inlet	mm (inch)	28 (1-3/32)		
	Outlet	mm (inch)	28 (1-3/32)		
Water Drain Hose Inner Diameter		mm (inch)	15 (19/32)		
Pump	Motor Type		DC Motor		
	No. of Speed		7 (Software Selection)		
	Input Power	W	92		
Hot Water Coil	Type		Brazen Plate		
	No. of Plates		36		
	Size (W × H × L)	mm	65 × 119 × 376		
	Water Flow Rate	l/min (m ³ /h)	Cooling: 28.7 (1.7) Heating: 34.4 (2.1)		
Pressure Relief Valve Water Circuit		kPa	Open: 300, Close: 266 and below		
Flow Switch			Electronic Sensor		
Protection Device		A	Residual Current Circuit Breaker (40)		
Expansion Vessel	Volume	l	10		
	MWP	bar	3		
Capacity of Integrated Electric Heater		kW	6.00		

Note:

- Cooling capacities are based on outdoor air temperature of 35°C Dry Bulb with controlled indoor water inlet temperature of 12°C and water outlet temperature of 7°C.
- Heating capacities are based on outdoor air temperature of 7°C Dry Bulb (44.6°F Dry Bulb), 6°C Wet Bulb (42.8°F Wet Bulb) with controlled indoor water inlet temperature of 30°C and water outlet temperature of 35°C.
- Specification are subjected to change without prior notice for further improvement.
- Flow rate indicated are based on nominal capacity adjustment of leaving water temperature (LWT) 35°C and $\Delta T = 5^\circ\text{C}$.

Product Ecodesign Information

Model No.: WH-SXC12H6E5 / WH-UX12HE5

Air-to-water heat pump [YES/NO]:	YES	Low-temperature heat pump [YES/NO]:	NO
Water-to-water heat pump [YES/NO]:	NO	Brine-to-water heat pump [YES/NO]:	NO
Equipped with a supplementary heater [YES/NO]:	YES		
Heat pump combination heater [YES/NO]:	NO		

Parameters shall be declared for medium-temperature application.

Parameters shall be declared for AVERAGE climate conditions:-

Item	Symb.	Value	Unit	Item	Symb.	Value	Unit
Rated heat output (*)	P_{rated}	12	kW	Seasonal space heating energy efficiency	η_s	130	%
Bivalent temperature	T_{biv}	-10	°C	Operation limit temperature	TOL	-10	°C
Degradation coefficient (**)	C_{dh}	0,9	—	Heating water operating limit temperature	$WTOL$	55	°C

Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T_j				Declared coefficient of performance for part load at indoor temperature 20 °C and outdoor temperature T_j			
$T_j = -7$ °C	P_{dh}	10,8	kW	$T_j = -7$ °C	COP_d	2,03	—
$T_j = +2$ °C	P_{dh}	6,1	kW	$T_j = +2$ °C	COP_d	3,19	—
$T_j = +7$ °C	P_{dh}	4,7	kW	$T_j = +7$ °C	COP_d	4,38	—
$T_j = +12$ °C	P_{dh}	5,7	kW	$T_j = +12$ °C	COP_d	5,89	—
$T_j = T_{biv}$	P_{dh}	11,7	kW	$T_j = T_{biv}$	COP_d	1,95	—
$T_j = TOL$	P_{dh}	11,7	kW	$T_j = TOL$	COP_d	1,95	—
$T_j = -15$ °C (if $TOL < -20$ °C)	P_{dh}	—	kW	$T_j = -15$ °C (if $TOL < -20$ °C)	COP_d	—	—
Cycling interval capacity for heating	P_{cyc}	—	kW	Cycling interval efficiency	COP_{cyc}	—	—

Power consumption in modes other than active mode:				Other items: (◇) (□)			
Off mode	P_{OFF}	0,003	kW	Capacity control	Variable		
Thermostat-off mode	P_{TO}	0,012	kW	Sound power level, indoor (◇)	L_{WA}	46	dB
Standby mode	P_{SB}	0,012	kW	Sound power level, outdoor (◇)	L_{WA}	66	dB
Crankcase heater mode	P_{CK}	0,033	kW	Sound power level, indoor (□)	L_{WA}	46	dB
Supplementary heater	P_{sup}	6,0	kW	Sound power level, outdoor (□)	L_{WA}	69	dB
Rated heat output (*)	ELECTRICAL HEATER			Annual energy consumption	Q_{HE}	7466	kWh
Type of energy input				Rated air flow rate, outdoor	—	4800	m ³ /h
For water- or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	—	—	m ³ /h	Emissions of nitrogen oxides	NO_x	—	mg/kWh

For heat pump combination heater:

Declared load profile	—			Water heating energy efficiency	η_{wh}	—	%
Daily electricity consumption	Q_{elec}	—	kWh	Daily fuel consumption	Q_{fuel}	—	kWh

Contact details for obtaining more information: (Name and address of the manufacturer or of its authorized representative.)
Panasonic Testing Centre, Panasonic Marketing Europe GmbH
Winsbergring 15, 22525 Hamburg, Germany

REMARK:

- You can find information and precautions relevant for installation and maintenance in the Operation Instructions.
 - You can find information relevant for recycling and/or disposal at end-of-life in the Operation Instructions.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output P_{rated} is equal to the design load for heating $P_{designh}$, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating $sup(T_j)$.
- (**) If C_{dh} is not determined by measurement, then the default degradation coefficient is $C_{dh} = 0,9$.
- (◇) Nominal A-Weighted Sound Power Level (L_{WA}), according to regulation 811/2013, 813/2013 and standard EN14825 at A7(6), in dB (A).
- (□) Maximum A-Weighted Sound Power Level (L_{WA}), according to EN12102-1 at A7(6) W55(47), in dB (A).

ACXF70-16921

Ürün Eko-tasarım Bilgisi

Model No.: WH-SXC12H6E5 / WH-UX12HE5

Havadan Suya Isı Pompası [EVET/HAYIR]:	EVET	Tuzlu sudan suya ısı pompası [EVET/HAYIR]:	HAYIR
Sudan suya ısı pompası [EVET/HAYIR]:	HAYIR	Düşük sıcaklık ısı pompası [EVET/HAYIR]:	HAYIR
Ek ısıtıcısı var mı? [EVET/HAYIR]:	EVET		
Isı pompası kombine ısıtıcı [EVET/HAYIR]:	HAYIR		

Orta sıcaklık uygulaması için parametreler bildirilecektir.

Parametreler ORTALAMA iklim şartları için verilir.

Madde	Sembol	Değer	Birim	Madde	Sembol	Değer	Birim
Nominal ısı güç (*)	P_{rated}	12	kW	Mevsimsel mahal ısıtma verimliliği	η_s	130	%
Bivalent sıcaklık	T_{biv}	-10	°C	Çalışma limit sıcaklığı	TOL	-10	°C
Bozulma Katsayısı (**)	C_{dh}	0,9	—	Isıtma suyu için çalışma limit sıcaklığı	WTOL	55	°C

İç ortam sıcaklığı 20 °C ve dış ortam sıcaklığı T_j iken kısmi yük için beyan edilen ısıtma kapasitesi				İç ortam sıcaklığı 20 °C ve dış ortam sıcaklığı T_j iken kısmi yük için beyan edilen performans katsayısı			
$T_j = -7$ °C	P_{dh}	10,8	kW	$T_j = -7$ °C	COP_d	2,03	—
$T_j = +2$ °C	P_{dh}	6,1	kW	$T_j = +2$ °C	COP_d	3,19	—
$T_j = +7$ °C	P_{dh}	4,7	kW	$T_j = +7$ °C	COP_d	4,38	—
$T_j = +12$ °C	P_{dh}	5,7	kW	$T_j = +12$ °C	COP_d	5,89	—
$T_j = T_{biv}$	P_{dh}	11,7	kW	$T_j = T_{biv}$	COP_d	1,95	—
$T_j = TOL$	P_{dh}	11,7	kW	$T_j = TOL$	COP_d	1,95	—
$T_j = -15$ °C (if TOL < -20 °C)	P_{dh}	—	kW	$T_j = -15$ °C (if TOL < -20 °C)	COP_d	—	—
Isıtma için çevrim aralığı kapasitesi	P_{cyc}	—	kW	Çevrim aralığı verimi	COP_{cyc}	—	—

Aktif konum dışında diğer çalışma konumlarında güç tüketimi :				Diğer maddeler : (◊) (□)			
Off konumu	P_{OFF}	0,003	kW	Kapasite Kontrol	Değişken		
Termostat-off konumu	P_{TO}	0,012	kW	Ses gücü seviyesi, İç ortam (◊)	L_{WA}	46	dB
Hazırda bekleme konumu	P_{SB}	0,012	kW	Ses gücü seviyesi, Dış ortam (◊)	L_{WA}	66	dB
Karter ısıtıcısı konumu	P_{CK}	0,033	kW	Ses gücü seviyesi, İç ortam (□)	L_{WA}	46	dB
Ek ısıtıcı	P_{sup}	6,0	kW	Ses gücü seviyesi, Dış ortam (□)	L_{WA}	69	dB
Nominal ısı güç (*)	ELEKTRİKLİ ISITICI			Yıllık enerji tüketimi	Q_{HE}	7466	kWh
Kullanılan enerji tipi				Nominal hava akış oranı, dış ortam	—	4800	m ³ /h
Tuzlu sudan suya ısı pompası için :	—	—	m ³ /h	Nitrojen oksit emisyonları	NO_x	—	mg/kWh
Tuzlu su veya su akış oranı dış ünite ısı değiştiricisi							

Isı pompası kombine ısıtıcı için:							
Beyan edilen yük profili	—			Su ısıtma enerji verimi	η_{wh}	—	%
Günlük enerji tüketimi	Q_{elec}	—	kWh	Günlük yakıt tüketimi	Q_{fuel}	—	kWh

Daha detaylı bilgi için : (İmalatçının veya yetkili temsilcinin adı ve adresi)
Panasonic Testing Centre, Panasonic Marketing Europe GmbH
Winsbergring 15, 22525 Hamburg, Germany

NOTLAR:

- Kullanım talimatlarında kurulum ve bakım için ilgili bilgi ve önlemleri bulabilirsiniz.
 - Kullanım talimatlarında kullanım ömrü sonunda geri dönüşüm ve/veya imha etme için ilgili bilgiyi bulabilirsiniz.
- (*) Isı pompası mahal ısıtıcılar için, nominal ısı güç P_{rated} ısıtma için tasarım yüküne $P_{designh}$ eşittir ve bir ek ısıtıcının maksimum ısıtma gücü P_{sup} ısıtma için ek kapasiteye eşittir $sup(T_j)$.
- (**) Eğer C_{dh} ölçümleme ile belirlenmemişse budurumda varsayılan bozulma katsayısı $C_{dh} = 0,9$ dur.
- (◊) Nominal A-Ağırlıklı Ses Gücü Seviyesi (L_{WA}), dB (A), A7(6)'de 811/2013, 813/2013 yönetmelikleri ve EN14825 standardına uygun.
- (□) Maksimum A-Ağırlıklı Ses Gücü Seviyesi (L_{WA}), dB (A), A7(6) W55(47)'de EN12102-1 standardına uygun.

ACXF70-65551

EU Declaration of Conformity

Document Number: MRD-D17019-04

Manufacturer

Name : Panasonic Corporation
Address : 1006 Kadoma, Kadoma City, Osaka, Japan
Factory Address 1 : Panasonic AVC Networks Czech, s.r.o.
U Panasonicu 1, 320 84, Plzeň, Czech Republic
Factory Address 2 : Panasonic Appliances Air-Conditioning Malaysia Sdn. Bhd.
Lot 2, Persiaran Tengku Ampuan, Sec. 21, Shah Alam Industrial Site,
Selangor, Malaysia.

Object of Declaration

< A >

Product Name : Air-to-Water Heat Pump System
Trade Name : Panasonic
Model Number : WH-SXC09H3E5 / WH-UX09HE5; WH-SXC12H6E5 / WH-UX12HE5
WH-SDC12H6E5 / WH-UD12HE5; WH-SDC16H6E5 / WH-UD16HE5

CE Requirements

This declaration of conformity is issued under the sole responsibility of manufacturer. The object of the declaration described above is in conformity with the requirements of the following EU legislation and harmonized standards:

Council Directive(s) : 2014/35/EU LVD < B >
2014/30/EU EMC
2011/65/EU ROHS
2009/125/EC ErP

Commission Regulation(s) : (EU) No.813/2013 Implementing measures for ErP Directive
(EU) No.622/2012 Implementing measures for ErP Directive

Council Recommendation(s) : 1999/519/EC EMF

Harmonized Standard(s) : < C >
EN 60335-2-40:2003 +A11:2004 +A12:2005 +A1:2006 +A2:2009 + A13:2012; EN 62233:2008
EN 60335-1: 2012 +A11:2014 +A13:2017; EN 61000-3-11:2000; EN 61000-3-12:2011
EN 61000-3-2:2014; EN 61000-3-3:2013; EN 55014-1:2017; EN 55014-2:2015; EN 50581:2012
EN 14511-2:2018; EN 14511-3:2018; EN 12102-1:2017; EN 14825:2016; EN 16297-1:2012
EN 16297-3:2012

Additional Information

< D >

Commission communication 2014/C 207/02 as per Commission Regulation (EU) No. 813/2013,
(EU) No. 622/2012, amending regulation (EC) No 641/2009 (Integrated Pump, ErP)
For RoHS, 2011/65/EU as amended by (EU)2015/863
Last two digit year when CE marking has been affixed the first time: 19
For translation refer to the attachment

02.07.2019
Date of Issue / Signature

Takahiko Ao / Director
Printed Name / Title

16. Juli 2019

Date of Issue / Signature

Niels Erdmann

Authorised Representative

Panasonic Testing Centre

Panasonic Marketing Europe GmbH

Winsbergring 15, 22525 Hamburg, Germany

Translation Data of the DoC's statement for Enlarged EU

CEQAD

(English)

The object of the declaration described above <A> is in conformity with the requirements of the following EU legislations and harmonized standards <C> and other provided information if any <D>.

(German)

Das oben beschriebene Objekt <A> entspricht den Anforderungen der nachfolgend aufgeführten EU-Richtlinien/ Verordnungen , harmonisierten Standards <C> und, wenn aufgeführt, weiteren Angaben <D>.

(French)

L'objet de la déclaration décrite ci-dessus <A> est conforme aux conditions stipulées dans les législations de l'Union européenne énoncées ci-après et aux normes harmonisées <C>, et autres informations fournies le cas échéant <D>.

(Spanish)

El objeto de la declaración mencionada anteriormente <A> es conforme a los requerimientos de las siguientes regulaciones CE y estándares armonizados <C> y a otra información provista, si aplica <D>.

(Italian)

L'oggetto <A> della dichiarazione sopra descritto è conforme ai requisiti delle seguenti legislazioni europee e norme armonizzate <C> e alle informazioni fornite se presenti <D>.

(Swedish)

Föremålet för den deklARATION som beskrivs ovan <A> är i överensstämmelse med kraven i nedan nämnda EU-lagstiftning och harmoniserade standarder <C> samt eventuell övrig information <D>.

(Dutch)

De inhoud van de verklaring hierboven <A> is conform de vereisten van de volgende EU wetgeving en de geharmoniseerde standaarden <C> en desgevallend met andere geleverde informatie <D>.

(Norwegian)

Gjenstand for erklæringen som beskrives ovenfor <A> er i overensstemmelse med kravene ifølge EU-lovene og de harmoniserte normer <C> og eventuell annen informasjon om denne foreligger <D>.

(Finnish)

Yllä mainitussa vaatimustenmukaisuusvakuutuksessa mainittu laite <A> täyttää EU-lainsäädäntöön sisältyvien seuraavien asetusten sekä harmonisoitujen standardien <C> vaatimukset. Ja muiden annettujen tietojen, jos yhtään on annettu <D>.

(Danish)

Genstanden for ovennævnte erklæring <A> er i overensstemmelse med kravene i følgende EU-lovgivning og harmoniserede standarder <C> Samt andet givet information hvis tilgængeligt <D>.

(Portuguese)

O objecto da declaração supra descrita <A> encontra-se em conformidade com os requisitos das legislações seguintes da UE e das normas standard <C> e outras informações providenciadas se existentes <D>.

(Greek)

Το αντικείμενο της παρούσας Δήλωσης, το οποίο περιγράφεται στο εδάφιο <A>, ανταποκρίνεται στις απαιτήσεις των ακόλουθων, στο εδάφιο αναφερόμενων Οδηγιών της Ευρωπαϊκής Ένωσης και των εναρμονισμένων πρότυπων κανονισμών του εδαφίου <C>. παρέχονται και άλλες πληροφορίες εφόσον υπάρχουν <D>..

(Hungarian)

A nyilatkozat fent említett tárgya <A> a következő EU rendeletek és harmonizált szabványok <C> követelményeivel összhangban van. És egyéb tájékoztató jellegű információ, ha felmerül <D>.

(Czech)

Cíl výše uvedeného prohlášení <A> je v souladu s požadavky následujících legislativních ustanovení EU a harmonizovanými normami <C> a další poskytnuté informace v případě <D>.

(Polish)

Przedmiot deklaracji opisany wyżej <A> jest zgodny z wymogami następujących przepisów prawnych UE i zharmonizowanych norm <C> potrzebne informacje zostały przekazane <D>.

(Slovene)

Predmeti, opisani v deklaraciji zgoraj <A> ustrezajo zahtevam zakonodaje EU in so v skladu s pristojnimi standardi <C>. in druge splošne informacije, v kolikor jih je <D>.

(Slovak)

Cieľ vyššie uvedeného prehlásenia <A> je v súlade s požiadavkami nasledujúcich legislatívnych ustanovení EÚ a harmonizovanými normami <C> a ďalšie poskytnuté informácie keď dostupné <D>.

(Estonian)

Ülalkirjeldatud deklareeritav toode <A> vastab Euroopa Ühenduse määruste ja ühtsete standardite <C> nõuetele. ja muu (sellega) seotud informatsioon <D>.

(Latvian)

Augstākminētās deklarācijas objekts <A> atbilst šādu ES likumdošanas aktu prasībām un vienotajiem standartiem <C> un citu sniegto informāciju, ja kāda ir <D>.

(Lithuanian)

Aukščiau aprašytos deklaracijos objektas <A> atitinka šių Europos Sąjungos įstatymų reikalavimus ir suderintus standartus <C> ir kita pateikta informacija jei yra <D>.

(Bulgarian)

Целта на горепосочената декларация <A> съответства на изискванията на следните законодателни актове на ЕС и хармонизираните стандарти <C> и друга предоставена информация, при наличие на такава <D>.

(Romanian)

Obiectul declarației descris mai sus <A> este în conformitate cu cerințele următoarelor legislații UE și standardele armonizate <C> și alte informații furnizate în cazul în care sunt <D>.

(Turkey)

Beyana tabi yukarıda yazılı <A> ürünler aşağıda belirtilen Avrupa Birliği mevzuatlarına, standartlarına <C> ve diğer ek bilgilere <D> uygundur.

(Croatian)

Predmet gore navedene izjave <A> je sukladan sa zahtjevima pravnih propisa EU u nastavku i harmoniziranih normi <C> i druge pružene informacije, ukoliko ih ima <D>.




ENERG
енергия · ενεργεια

Y IJA
IE IA


Panasonic

WH-SXC12H6E5 / WH-UX12HE5



55 °C

35 °C

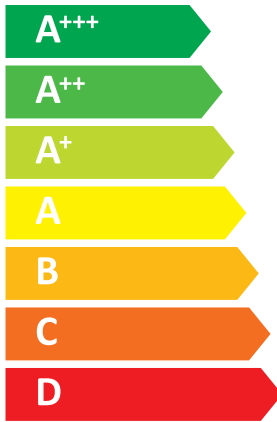

A⁺⁺

A⁺⁺

46 dB

66 dB

2019

■ 13	■ 14
■ 12	■ 12
■ 12	■ 12
kW	kW

811/2013

ACXF86-06071